


ECONO-60 CARTONER

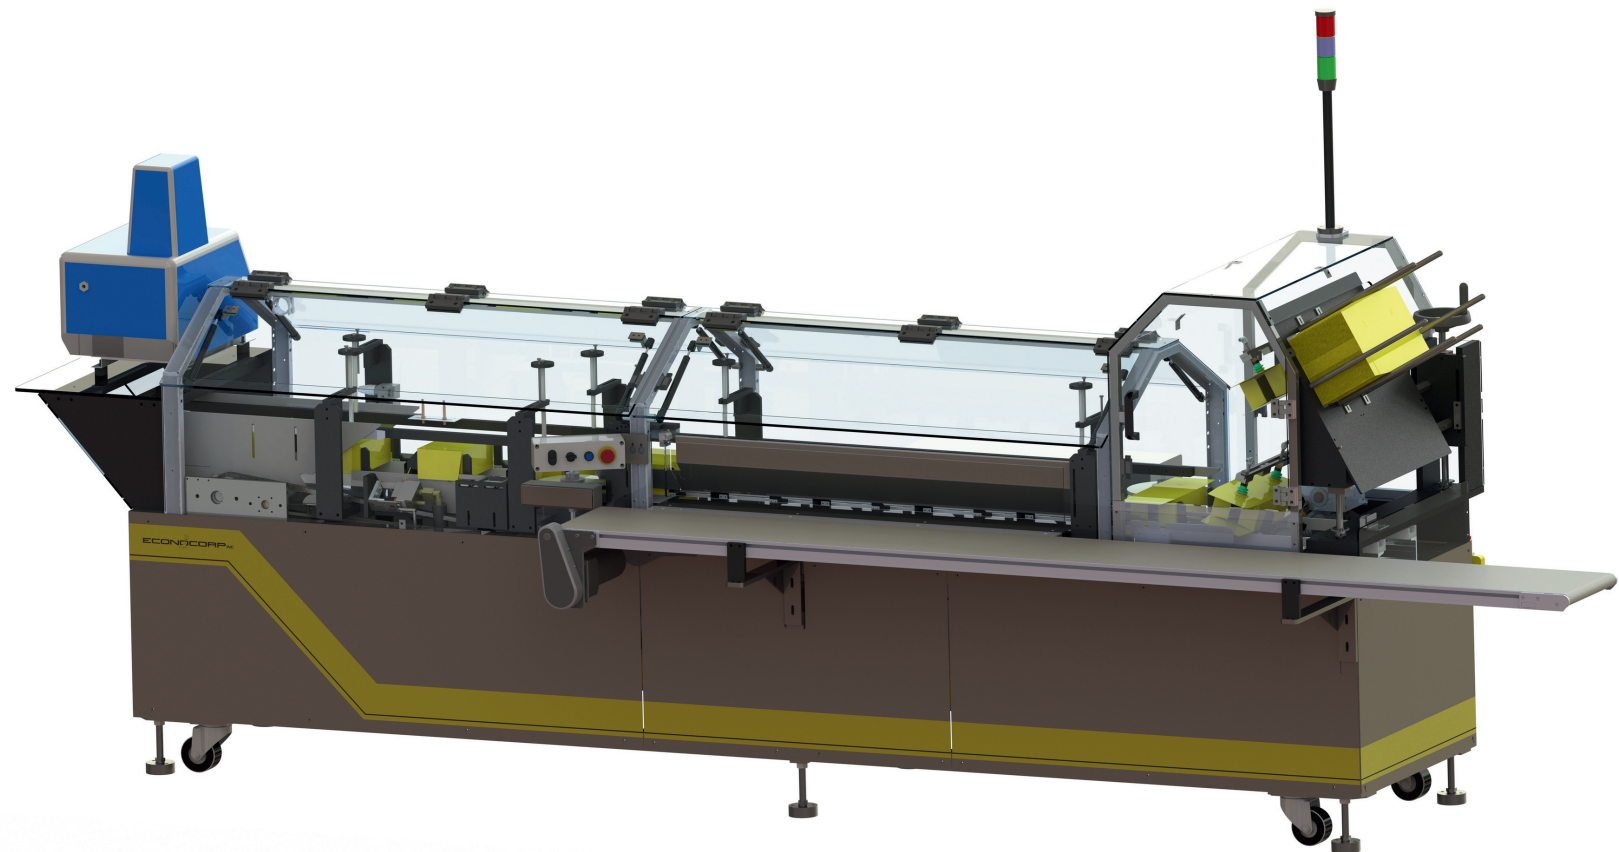


72 Pacella Park Drive, Randolph , MA 02368 •
TEL:+1(781)986-7500 • info@econocorp.com

ECONO-60

METHOD OF OPERATION

1. End load carton is picked from a hopper via rotary vacuum head
2. Carton is automatically erected and placed into a continuous motion flighted chain assembly
3. Opposite load side minor flaps are folded
4. Carton is advanced to a 42" load station where operator(s) manually load the product
5. Loaded carton travels down the machine and the rest of the flaps are folded, glued and compressed
6. Completed carton is then automatically discharged from the machine

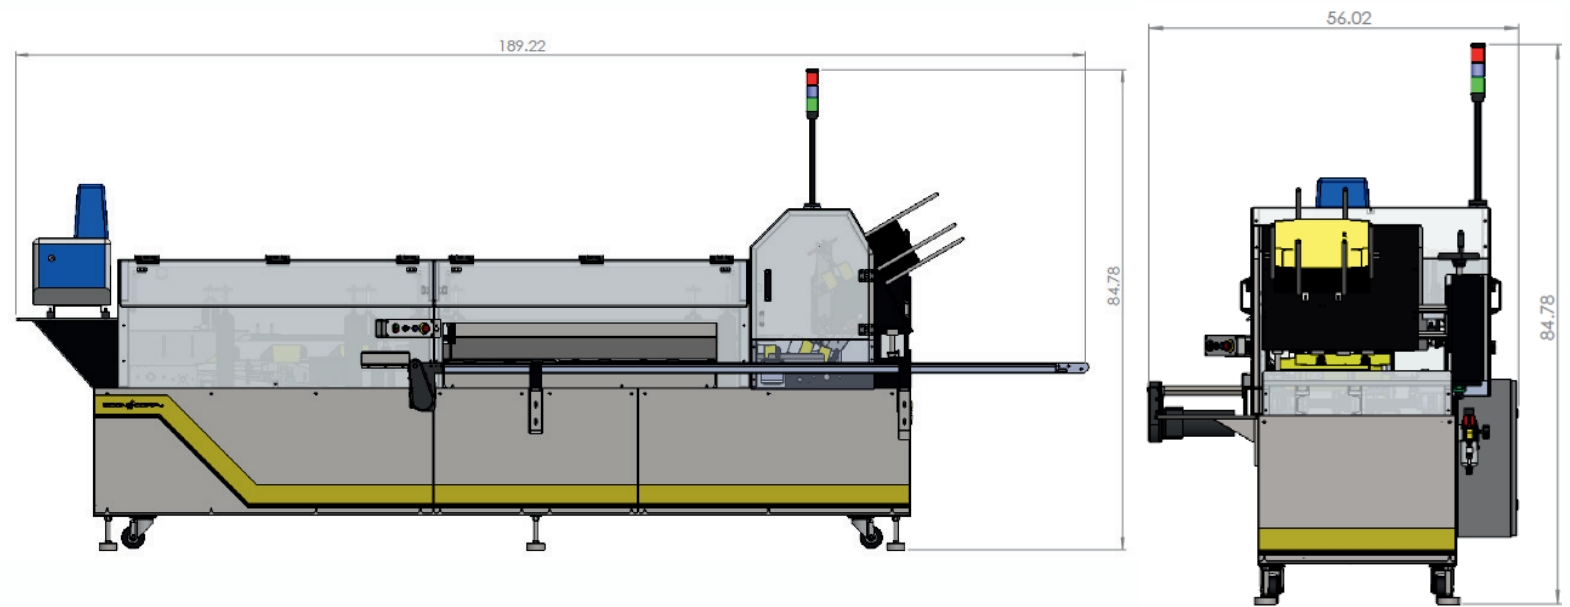

SPECIFICATIONS

Features

- Continuous Motion
- Compact design
- Sanitary Construction
- Quick & Simple Change over
- 42" Load Area

Packing Materials

- Paperboard
- Corrugate

Speed

- Up to 60 Cartons per Minute

Size Range

- Min: 1" x 3/4" x 4"
- Max: 8" x 3" x 12"

Voltage & Controls

- 220 Volts, 50/60 Hz, Single Phase

Air Consumption

- 5.5 bar
- 80 PSI

Shipping

- Approximately 2,400 lbs

*All Engineering Specifications and Designs are subject to change based on individual requirements